


Copeland®

Scroll Compressor Unit with Electrical Control

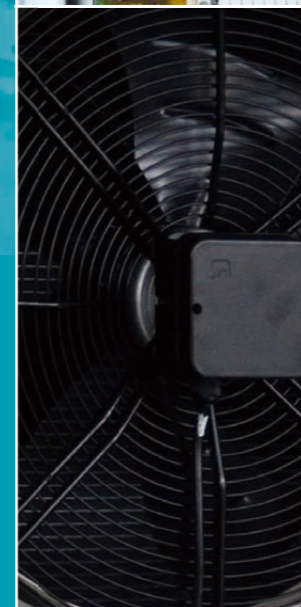

Nomenclature:

MCSD-02Z

M: Temperature M: -5 ~ +5°C, L: -20 ~ -15°C

CS: CU/AL Condenser with Horizontal Air Discharge housing

D: Compressor Type D: Danfoss; G: Copeland

02: HP

Z: Refrigerant Z: for R404A/R448A/R449A

Product Description:

- ★ Traditional CU/AL Condenser;
- ★ Low Noise/High Efficient Axial Fan Motor;
- ★ Original Danfoss/Copeland/Highly Refrigeration Components;
- ★ Extraordinary Cost-Effectiveness Performance.
- ★ Electrical control inside.



Supcool Refrigeration Equipment Factory

Copeland Packed Unit (Horizontal Discharge)

Model	MCSG-02Z	MCSG-03Z	MCSG-04Z	MCSG-05Z	MCSG-06Z	MCSG-07Z
Room Temperature (°C)	-15°C ~ +5°C					
Refrigerant	R404A / R448A / R449A					
Power Supply	380V/3P/50HZ					
Compressor	ZB15KQE	ZB21KQE	ZB29KQE	ZB38KQE	ZB45KQE	ZB48KQE
Condenser Fan	Fan Qty	1 X Φ450	1 X Φ450	2 X Φ400	2 X Φ400	2 X Φ400
	Fan Voltage	220V/1P/50HZ 6poles				
Condenser	Heat Exchange Area (m²)	21	30.3	37.2	45.5	59.2
	Condensing Capacity (kw)	5.6	8	9.9	12.1	14.4
	Fin Space (mm)	2	2	2	2	2
Evap -5°C	Cooling Capacity (W)	3820	5740	7840	9720	11450
	Lnput (kw)	1.76	2.5	3.32	4.2	4.79
Evap -10°C	Cooling Capacity (W)	3070	4680	6370	7910	9310
	Lnput (kw)	1.82	2.51	3.35	4.2	4.81
Evap -15°C	Cooling Capacity (W)	2430	3780	5120	6380	7510
	Lnput (kw)	1.88	2.52	3.37	4.2	4.82
Evap -20°C	Cooling Capacity (W)	1860	3010	4070	5090	6000
	Lnput (kw)	1.93	2.52	3.39	4.19	4.81
Pipe	Gas (inch)	3/4	3/4	7/8	7/8	7/8
	Liquid (inch)	3/8	1/2	1/2	1/2	1/2
Dimension (mm)	1300x560x690	1300x560x690	1300x560x990	1300x560x990	1300x560x990	1300x560x990

Condensing temp:45°C

Copeland Packed Unit (Horizontal Discharge)

Model	LCSG-02Z	LCSG-03Z	LCSG-04Z	LCSG-05Z	LCSG-06Z	LCSG-07Z
Room Temperature (°C)	-25°C ~ -10°C					
Refrigerant	R404A / R448A / R449A					
Power Supply	380V/3P/50HZ					
Compressor	ZS106KQE	ZS109KQE	ZS111KQE	ZS115KQE	ZS118KQE	ZS121KQE
Condenser Fan	Fan Qty	1 X Φ450	1 X Φ450	2 X Φ400	2 X Φ400	2 X Φ400
	Air Flow(m³/h)	220V/1P/50HZ 6poles				
Condenser	Heat Exchange Area (m²)	21	30.3	37.2	45.5	59.2
	Condensing Capacity (kw)	5.6	8	9.9	12.1	14.4
	Fin Space (mm)	2	2	2	2	2
Evap -20°C	Cooling Capacity (W)	2330	3240	4120	5930	7230
	Lnput (kw)	1.79	2.25	2.63	3.59	4.44
Evap -25°C	Cooling Capacity (W)	1880	2620	3340	4830	5910
	Lnput (kw)	1.73	2.2	2.57	3.44	4.28
Evap -30°C	Cooling Capacity (W)	1500	2070	2610	3790	4780
	Lnput (kw)	1.66	2.12	2.44	3.3	4.17
Pipe	Gas (inch)	3/4	3/4	7/8	7/8	7/8
	Liquid (inch)	3/8	1/2	1/2	1/2	1/2
Dimension (mm)	1300x560x690	1300x560x690	1300x560x990	1300x560x990	1300x560x990	1300x560x990

Remarks: Condensing temp:45°C

Copeland Packed Unit (Vertical Discharge)

Model	MCSG08/U	MCSG10/U	MCSG13/U	MCSG15/U	MCSG20/V	MCSG25/V	MCSG30/V
Room Temperature (°C)	-15°C ~ +5°C						
Refrigerant	R404A / R448A / R449A						
Power Supply	380V/3P/50HZ						
Compressor	ZB58KQE	ZB76KQE	ZB95KQE	ZB114KQE	ZB130KQE	ZB190KQE	ZB220KQE
Condenser Fan	Fan Qty	1 X Φ550	2 X Φ500	2 X Φ500	2 X Φ550	2 X Φ630	2 X Φ700
	Input (W)	600	2 X 380	2 X 380	2 X 600	2 X 800	2 X 750
	Fan Voltage	380V/3P/50HZ 6poles					
Condenser	Heat Exchange Area (m²)	70	90	110	120	155	240
	Heat Exchange Capacity (W)	24640	30500	39050	42240	55025	82800
Evap -5°C	Cooling Capacity (W)	15224	20306	24843	29593	39264	59489
	Input (kw)	6.41	8.35	10.77	12.75	15.63	25.77
Evap -10°C	Cooling Capacity (W)	12588	14511	20591	24344	32737	50626
	Input (kw)	6.38	8.28	10.71	12.73	15.49	25.36
Evap -15°C	Cooling Capacity (W)	10213	13846	16673	19618	26932	44812
	Input (kw)	6.38	8.22	10.69	12.73	15.28	24.1
Evap -20°C	Cooling Capacity (W)	8004	11163	14060	16768	21698	42684
	Input (kw)	6.42	8.17	10.5	12.71	15	21.28
Pipe	Gas (inch)	7/8	7/8	7/8	1	1-1/8	1-1/4
	Liquid (inch)	5/8	5/8	5/8	3/4	3/4	7/8
Dimension (mm)	900x770x1000	1330x950x890	1480x950x990	1730x1050x1000	1600x1000x1650	1750x1000x1880	1900x1175x1980

Remarks: Condensing temp:45°C

Danfoss Packed Unit (Horizontal Discharge)

Model	MCS02Z	MCS03Z	MCS04Z	MCS05Z	MCS06Z	MCS07Z
Room Temperature (°C)	-18°C ~ +5°C					
Refrigerant	R404A / R448A / R449A					
Power Supply	380V/3P/50HZ					
Compressor	MLZ015T4	MLZ021T4	MLZ030T4	MLZ038T4	MLZ045T4	MLZ048T4
Condenser Fan	Fan Qty	1 X Φ450	1 X Φ450	1 X Φ450	2 X Φ450	2 X Φ450
	Air Flow(m³/h)	4500	4500	4500	4500	7490
	Fan Voltage	220V/1P/50HZ 4poles				
Evap 0°C	Cooling Capacity (W)	4560	6231	9439	11495	13386
	Input (kw)	1.95	2.5	3.6	4.3	5.1
Evap -10°C	Cooling Capacity (W)	3130	4324	6556	7943	9541
	Input (kw)	1.85	2.48	3.5	4.21	5.02
Evap -15°C	Cooling Capacity (W)	2538	3705	5382	6394	7932
	Input (kw)	1.82	2.45	3.45	4.18	4.95
Evap -20°C	Cooling Capacity (W)	1995	3040	4512	5367	6370
	Input (kw)	1.8	2.42	3.4	4.15	4.9
Evap -25°C	Cooling Capacity (W)	1581	2500	3657	4230	5320
	Input (kw)	1.75	2.4	3.37	4.1	4.87
Pipe	Gas (inch)	3/4	3/4	7/8	7/8	7/8
	Liquid (inch)	3/8	1/2	1/2	1/2	1/2
Dimension (mm)	1100x475x610	1100x475x610	1100x475x1130	1100x475x1130	1100x475x1130	1100x475x1130

Remarks: Condensing temp:45°C

Supcool Refrigeration Equipment Factory